Product Information

Flush mounted switching power supply

A. u. K. Müller

Solenoid valves
Control valves
Special valves and systems

A.u.K. Müller GmbH & Co. KG
Dresdener Str. 162
D-40595 Düsseldorf/Germany

Tel.: +49(0)211-7391-0
Fax: +49(0)211-7391-281

e-mail: info@akmueller.de
Internet: www.akmueller.de

Series UPS-01



Characteristics

- Flush mounted switching power supply
- Wide voltage range on the primary side (90-264VAC / 47-63Hz)
- Secondary output (12V DC ± 5%) with built-in short circuit protection
- Potted in durable polycarbonate housing (V0)
- Efficiency class V
- Max. Power 20 W
- Approvals on request

Applications

- Supply of up to five sensor / valve units (eg. IRS-WT-x / 50 .007.101)
- Flush mounting in municipal facilities

Description

Flush mounting power supply for infrared sensors.

The power supply allows the operation of up to five sensor / valve units simultaneously.

On the primary side, two power lines (L & N) are potted to prevent the risk of electric shock.


On the secondary side, screw terminals allow the flexibility of choosing the correct cabling for the sensor / valve units.

An electronic short circuit protector is provided which automatically reverts to the normal function when the cause of the short circuit is removed.

In the flush mounted power supply there is no energy storage, so for failsafe operation, it is recommended to use the SC2 cable for each sensor / valve unit. This has a built in energy store that provides a closing pulse to the valve in the event of a power failure.

For other connections our SC1 cables are recommended.

The following schematic diagram shows a typical installation.

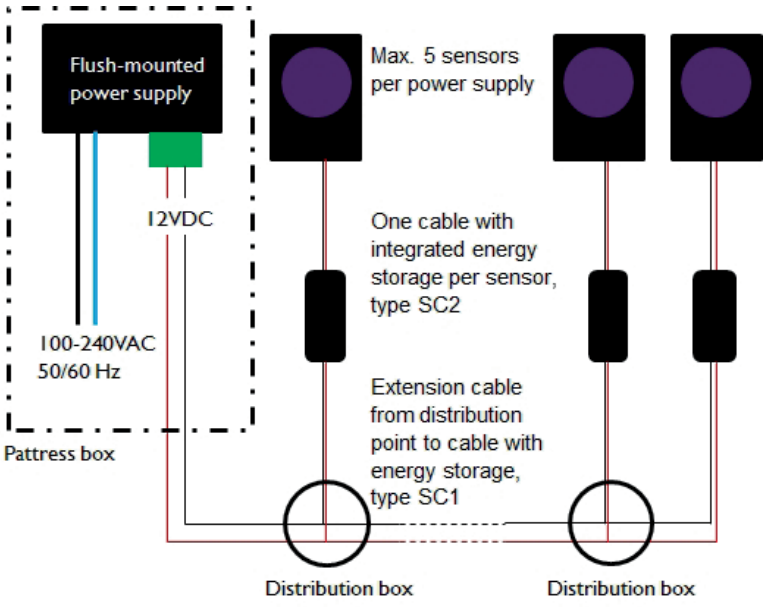


© copyright A.u.K. Müller, subject to changes without prior notice

Flush mounted switching power supply

A. u. K. Müller


Series UPS-01

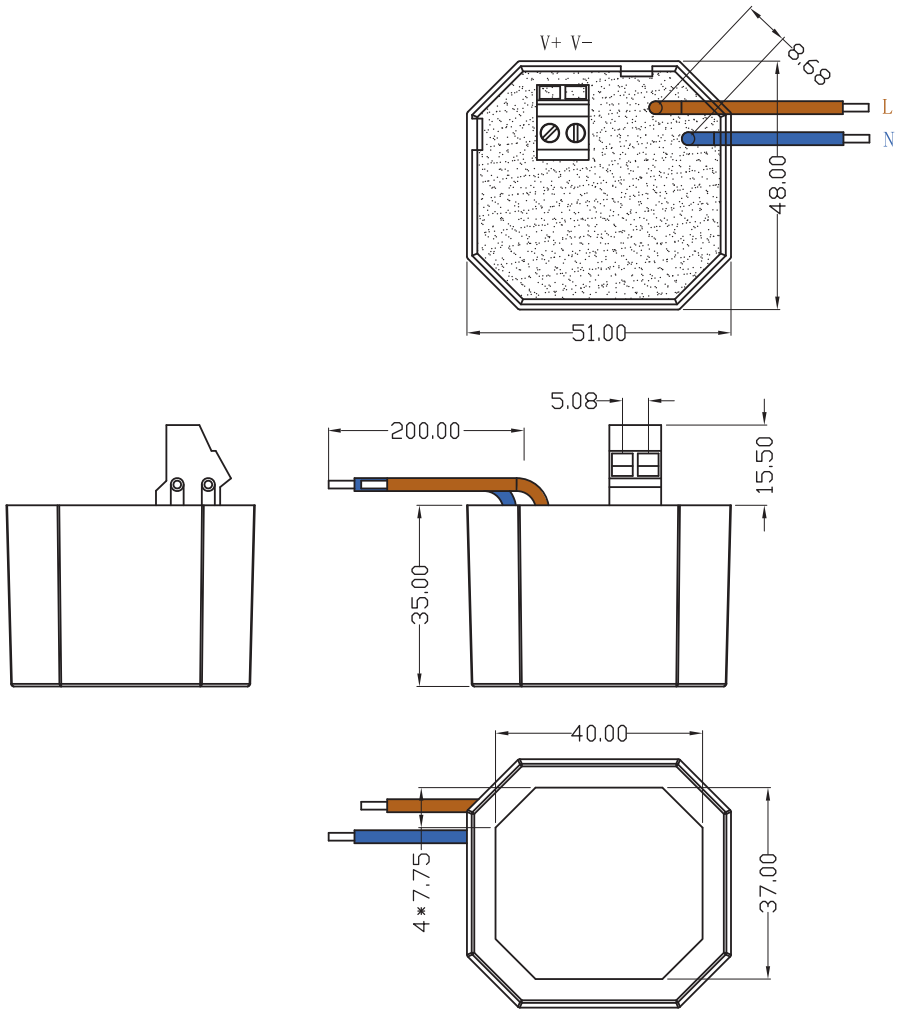

Technical Data

Type	flush-mounted switching power supply
Efficiency classification	V
Dielectric Strength	4242 VDC, primary to secondary
Primary	
Nominal input voltage	100 - 240 V
Input working voltage	90 - 264 V
Nominal frequency	50 - 60 Hz
Working frequency	47 - 63 Hz
Input current AC	max. 0,6 A
Input protection	Protection in phase (l) and neutral (N)
Inrush current	30 A max. cold start at 240 V input voltage
Input wires	2 x 200 mm stranded UL style 1015 neutral - blue line - brown
Protection	Internal, potted fuse, not exchangeable
Secondary	
Output voltage	12 V DC ± 5%
Output current	0 – 1,67 A
Output rating	20 W max.
Ripple	1 % of output voltage
Short circuit protection	Electronically protected, automatic recovery function
Overvoltage protection	15 V max.
Output connector	2 position terminal block
Environment	
Working temperature	0 – 40 °C (32 – 104 °F)
Storage temperature	-10 – 80 °C (14 – 176 °F)
Humidity at operation	0 – 90 % RH
Humidity at storage	0 – 90 % RH
Protection class	IP 00
Mechanical	
Weight	155 g

Power derating depending on ambient temperature

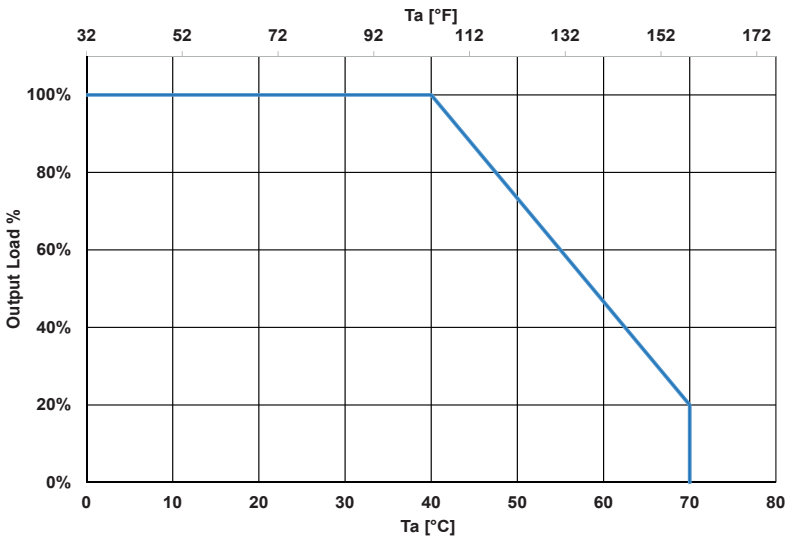

Materials

Housing	PC 66 UL 94: V0

E1016 © copyright A.u.K. Müller, subject to changes without prior notice

Series UPS-01

Efficiency data (EC/278/2009)

Description	Load condition				
	100%	75%	50%	25%	0%
RMS Output current [mA]	1675,66	1255,66	838,22	418,85	-
RMS. Output voltage [V]	12,06	12,06	12,07	12,07	-
Active output power [W]	20,20	15,14	10,11	5,05	-
RMS. Input voltage [V AC]	**115**				
RMS. Input power [W]	24,58	18,30	12,19	6,26	0,12
Total Harmonic distortion (THD)	78,34%	81,21%	84,40%	87,96%	35,23%
True power factor	0,58	0,55	0,51	0,44	0,03
Power consumed [W]	4,37	3,15	2,08	1,22	0,12
Efficiency	82,20%	82,75%	82,88%	80,57%	-
Average Efficiency	82,10%				

Description	Load condition				
	100%	75%	50%	25%	0%
RMS Output current [mA]	1676,13	1256,04	838,46	419,27	-
RMS. Output voltage [V]	12,06	12,15	12,07	12,07	-
Active output power [W]	20,20	15,25	10,10	5,05	-
RMS. Input voltage [V AC]	**230**				
RMS. Input power [W]	24,06	18,31	12,30	6,41	0,20
Total Harmonic distortion (THD)	87,81%	89,00%	90,13%	90,55%	19,30%
True power factor	0,45	0,42	0,38	0,31	0,02
Power consumed [W]	3,86	3,06	2,20	1,36	0,20
Efficiency	84,00%	82,69%	82,13%	78,78%	-
Average Efficiency	81,90%				

Proposal for installation

The installation and connection can be implemented as shown in this example:

1. Assembly in pattress box according to VDE 0606
2. Primary connection e.g. with WAGO 273
3. Line distribution with surface or flush mounted boxes and connection by e.g. WAGO 222 (2 to 5 poles)
4. For the connection between UPS-01 and distribution boxes (max. 50 m) use cables with a higher cross section (for example, 0,35mm²)
5. Use the cable SC1 for the last meters from the distribution box to the sensor
6. Use the calbe SC2 with integrated energy storage directly in front of the sensor



© copyright A.u.K. Müller, subject to changes without prior notice