3/2-way Lever Valve, DN 9

Product Information

Series 47.009.303

A. u. K. Müller

Solenoid valves
Control valves
Special valves and systems

A. u. K. Müller GmbH & Co. KG
Dresdener Str. 162
D-40595 Düsseldorf/Germany

Tel.: +49(0)211-7391-0
Fax: +49(0)211-7391-281

e-mail: info@akmueller.de
Internet: www.akmueller.de



Function: Mixing (ID: 090902)



Function: Distribution (ID: 090904)

Characteristics

- Direct acting
- Medium separated
- Minimal dead areas in valve body
- Long term performance capability
- No minimal pressure required
- Suitable for hot water appliances (90 °C)
- Easy to assemble and service
- Low power consumption
- Any fitting position
- High operating safety through the use of high quality materials and 100% final testing of the products

Description

Direct acting 3/2-way solenoid lever valve with orifice size DN 9 for control of neutral gases and liquids. The plunger of the magnetic system is protected from the medium by spatial separation. In particular, the low dead space is a further advantage of the lever valves.

Valves of this design are single chamber valves with threaded connections.

The coil system can be customised for common voltage and frequency ranges on request.

The electrical operational safety is guaranteed by the electrical insulation coordination, which corresponds to the VDE 110 regulations. The manufacturing process includes a 100% electrical safety test in accordance with the VDE 0631 Part 1000 regulations.

Due to the use of high quality materials, the valve is applicable for high ambient and medium temperatures up to 90 °C.


The good thermal separation between the fluid path and the solenoid coil also allows the use of temperature sensitive media, such as in the medical technology or analytics.

The valve is ideally suited for dosing applications as well as distribution of fluids.

Applications

- Tank or boiler draining
- Medical engineering
- Laboratory / analysis equipment
- Industrial applications


Typical Performance Curve Under Laboratory Conditions

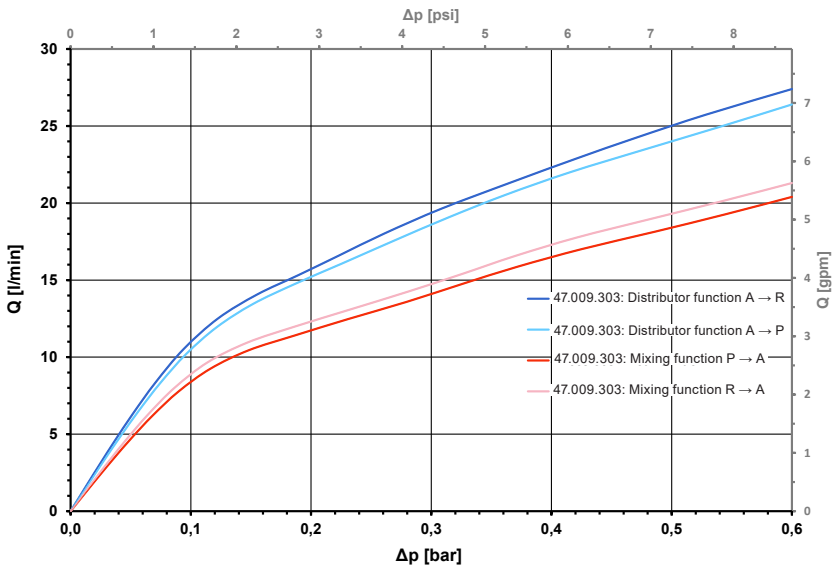

© copyright A.u.K. Müller, subject to changes without prior notice

Series 47.009.303

Function: Mixing (ID: 090902)

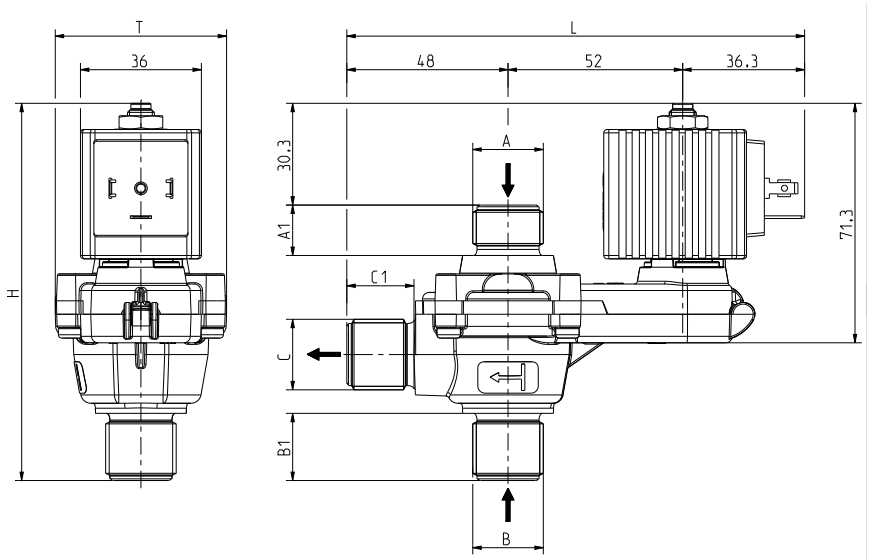


Technical Data

Type	Lever solenoid valve	
Construction	3/2-way single chamber valve, direct acting, media separated	
Function	NO (normally open: R → A) NC (normally closed: P → A)	
Fitting position	Any, preferably with coil upwardly	
Media	Cold and heated water and physically and chemically similar media	
T-Medium	90	°C max.
T-Ambient	60	°C max.
DN	9	mm
p-Operating	0 - 0,6	bar
Coil type	MS 44	
Nominal voltages	see options	
	other voltages on request	
Voltage tolerance	±10 % DC +10 / -5 % AC	
Duty cycle	100%	
Protection Type	IP 00 up to IP 65 according to EN 60529	
Coil connections	Plug socket according to EN 175301-803 (IP65)	
Insulation class	H	according to EN 60730-2-8
Protection class	I	according to EN 60730-2-8 (for incorporation in class I)

Materials

Valve body	PPE
Plunger guide	stainless steel
Plunger and spring	stainless steel
Membrane and sealings	FKM
Coil coating	PA
Filter (inlet)	stainless steel (on request)

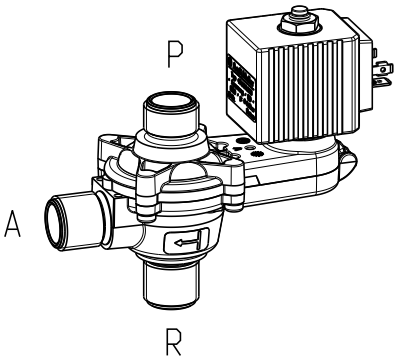

Options

ID	Material	Inlet				Outlet		Length	Height	Depth	Voltages
		Ø A	A1	Ø B	B1	Ø C	C1	L	H	T	
090902	PPE	G 1/2	15,0	G 1/2	20,0	G 1/2	20,0	136,3	112,3	51,0	24 V DC
090905											24 V AC 50 Hz
090912											110 V AC 50 Hz 120 V AC 60 Hz
090913											230 V AC 50 Hz

⚠ ATTENTION ⚠

Danger due to high voltages 110, 120, 230 V AC.
Disconnect the system from the power supply before carrying out maintenance or installation work. Connection work may only be carried out by qualified personnel.


E0721 © copyright A.u.K. Müller, subject to changes without prior notice

3/2-way Lever Valve, DN 9

A. u. K. Müller

Series 47.009.303

Function: Distribution (ID: 090904)

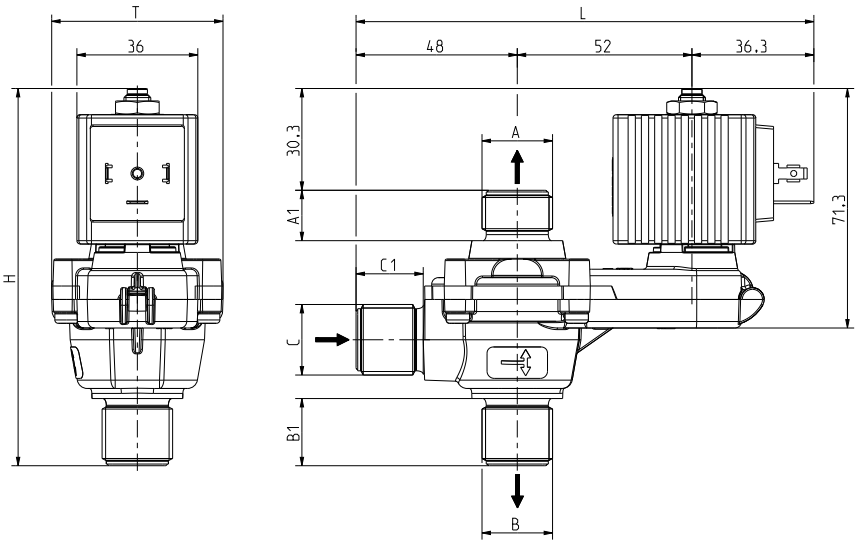


Technical Data

Type	Lever solenoid valve	
Construction	3/2-way single chamber valve, direct acting, media separated	
Function	NO (normally open: R → A) NC (normally closed: P → A)	
Fitting position	Any, preferably with coil upwardly	
Media	Cold and heated water and physically and chemically similar media	
T-Medium	90	°C max.
T-Ambient	60	°C max.
DN	9	mm
p-Operating	0 - 0,6	bar
Coil type	MS 44	
Nominal voltages	see options	
	other voltages on request	
Voltage tolerance	±10 % DC +10 / -5 % AC	
Duty cycle	100%	
Protection Type	IP 00 up to IP 65 according to EN 60529	
Coil connections	Plug socket according to EN 175301-803 (IP65)	
Insulation class	H	according to EN 60730-2-8
Protection class	I	according to EN 60730-2-8 (for incorporation in class I)

Materials

Valve body	PPE
Plunger guide	stainless steel
Plunger and spring	stainless steel
Membrane and sealings	FKM
Coil coating	PA
Filter (inlet)	stainless steel (on request)

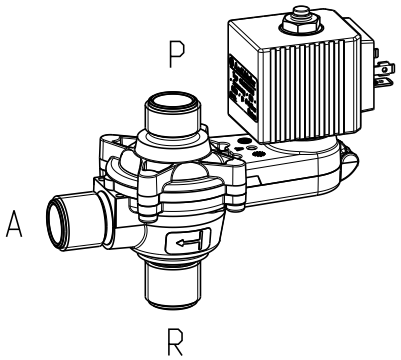

Options

ID	Material	Outlet				Inlet		Length	Height	Depth	Voltages
		Ø A	A1	Ø B	B1	Ø C	C1	L	H	T	
090904	PPE	G 1/2	15,0	G 1/2	20,0	G 1/2	20,0	136,3	112,3	51,0	24 V DC
090907											24 V AC 50 Hz
090910											110 V AC 50 Hz 120 V AC 60 Hz
090911											230 V AC 50 Hz

⚠ ATTENTION ⚠

Danger due to high voltages 110, 120, 230 V AC.
Disconnect the system from the power supply before carrying out maintenance or installation work. Connection work may only be carried out by qualified personnel.

© copyright A.u.K. Müller, subject to changes without prior notice

Series 47.009.303

Solenoid valves
Control valves
Special valves and systems

A. u. K. Müller GmbH & Co. KG
Dresdener Str. 162
D-40595 Düsseldorf/Germany

Tel.: +49(0)211-7391-0
Fax: +49(0)211-7391-281

e-mail: info@akmueller.de
Internet: www.akmueller.de

 © copyright A.u.K. Müller, subject to changes without prior notice