

Used milk cooling tank Model P

The Mueller tank is exclusively made of AISI 304 quality stainless steel (DIN-1.4301) and complies with the ISO 5708 standard for milk cooling tanks. In addition, the tank is superbly made (welded seamless) and polished. The heavy beam profile and adjustable legs ensure a uniform weight distribution, so that the tank can be placed in almost every bulk milk tank room. A fixed solid stainless ladder is fitted to the tank from model P-2100 upwards.



The P model includes the following features:

- Cleaning water level control.
- Deep-cool switch.
- Automatic cool start.
- Digital temperature indication.
- Fitted ladder from model P-2100 upwards.
- Dipstick.
- Calibration card.

CIRCULATION CLEANING SYSTEM (CRS)






The circulation cleaning system was developed in the early 1990s. This fully-automated cleaning system (based on circulation cleaning) is mounted on the front side of the O-model.

QUICK CLEANING SYSTEM (VRS)



The cleaning system was further developed into a quick-wash cleaning system at the end of the 1990s. This quick wash or displacement cleaning system has major advantages compared to the circulation cleaning system:

- more economical (about 35% water saving).
- quicker (about 50% less cleaning time).
- environmentally friendly (less water and electricity consumption).

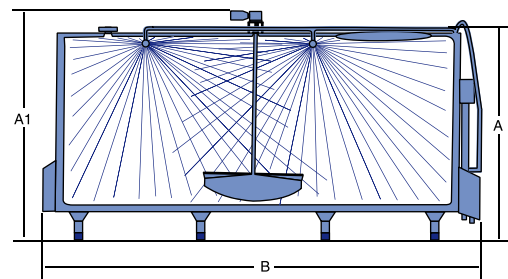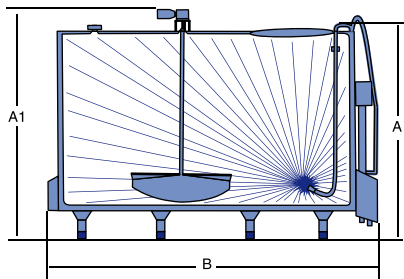

Dimension (mm)


Model	Maximum capacity in Litres	Length (B)	Width (C)	Height (A) incl. Spray Pipe horizontally measured	Height (A1) incl. agitator horizontally measured
P 1200	1.300	1965	1170	1380	1610
P 1400	1.500	2185	1170	1380	1610
P 1700	1.800	2530	1170	1380	1610
P 2100	2.250	2415	1330	1550	1780
P 2600	2.750	2840	1330	1550	1780
P 3200	3.400	2935	1440	1680	1910
P 4100	4.350	3620	1440	1680	1910
PC 5000	5.070	2930	1740	1960	2130
P 6000	6.125	3435	1740	1960	2130
P 7000	7.120	3915	1740	1960	2150
P 8000	8.075	3435	1980	2130	2390
P 9000	9.100	3815	1980	2130	2400
P 10000	10.000	4150	1980	2100	2400
P 12000	12.000	4880	1980	2100	2430
P 15000	15.460	4880	2240	2410	2700
P 18000	18.000	5605	2240	2410	2750
P 20000	21.800	4910	2630	2800	3050
P 24000	25.200	5605	2630	2800	3090

Length incl. Quick cleaning system (VRS) is +50 mm.

Your Mueller dealer:

Mueller Sales

Narcisstraat 14
 P.O.Box 138
 9400 AC Assen
 The Netherlands
 T: +31 (0)592 361 600
 F: +31 (0)592 361 601
 E: info@muellerbv.com

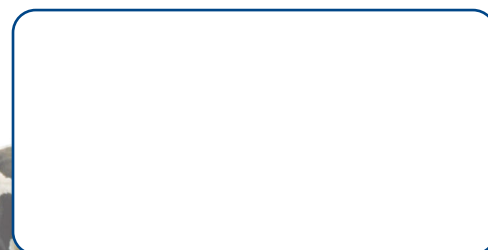

www.muellerbv.com

